
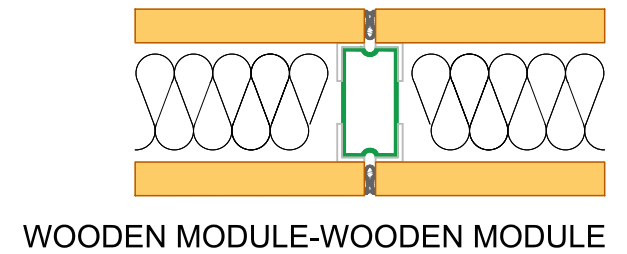
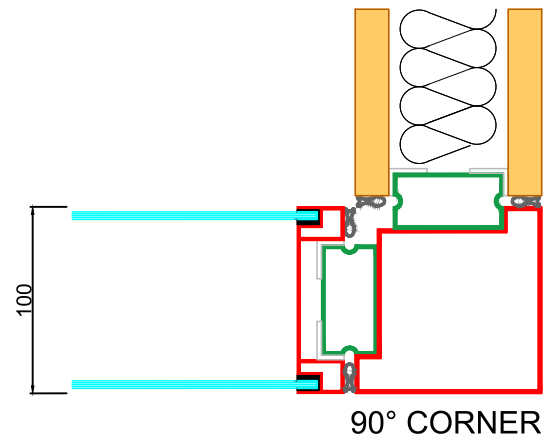

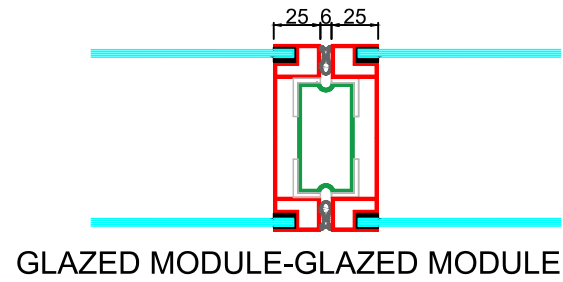




VERTICAL SECTION

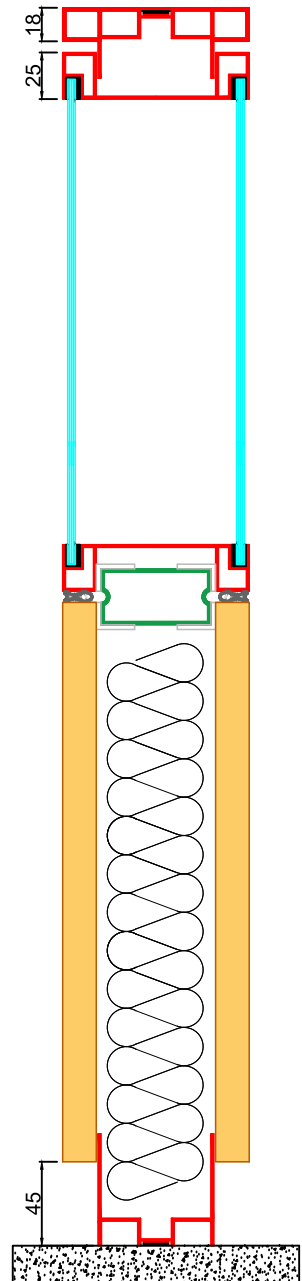

TECHNICAL SPECIFICATIONS

BETA SEPERATOR

Wall Thickness	: 100 mm
Main Profiles	: 60 x 30 x 1.8 mm Aluminum Or Galvanized Steel Profiles
Corner Profiles	: 90 Degree Or Versatile Aluminum Corners
Module Widths	: Suitable For Architectural Needs
Module Heights	: Sizes up to 3500 mm
Tolerance	: 20 mm in Height and Width
Weight	: 35 - 45 kg/m ²
Aluminum Profiles	: E6 / EV1 Anodized Coating or Electrostatic Powder Coating
Profile Thickness	: 1.8 -2 mm Aluminum
Glazed Modules	: Semi-Monobloc Or Full Monobloc Modules
Glass Properties	: Transparent Glasses Bronze, Smoked, Blue - Colored Glasses Antireflect Glasses Extra Clear Glasses Opaque Glasses
Types Of Glass	: 2 x 4 mm Flat Or Tempered Double Glass 2 x 6 mm Flat Or Tempered Double Glass 2 x (3 + 3 mm) Laminated Double Glass 2 x 4 mm Tempered RAL Code Painted Double Glass 2 x 6 mm Tempered RAL Code Painted Double Glass
Joints	: 6 mm Width - Special Rubber-Based Seal That Prevents Sound Transmission Between Joints in Horizontal and Vertical
Glass Wicks	: PVC Profile That Receives Vibrations in The Same Color As The System
Wooden Modules	: Panel Edges 1-2 mm PVC Tape, E1 Quality 18 mm Thick Melamine or MDF Lam Panels
Wooden Module Surfaces	: Melamine-HPL Laminate Coating-Natural Wood Coating-Fabric-MDF Painted Glass Over Lam Panel
Jalousie	: Metal Or Wooden Jalousie Between Two Glass-Motorized Remote Controlled Jalousie

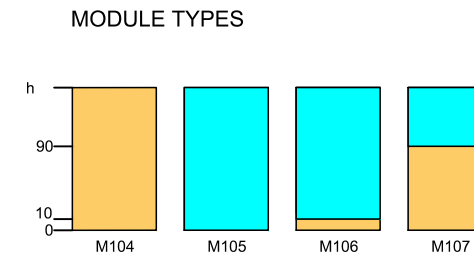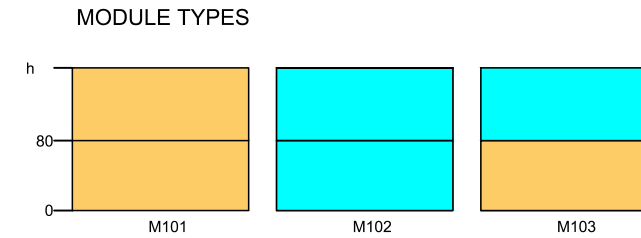

inter-mat

MODULAR PARTITION WALL SYSTEMS